

600AJ

ARTICULATING BOOM LIFTS



- Tough & reliable diesel articulating boom lift
- Powerful 4-wheel drive for rough terrain
- Robust, rental-tough design
- Simple to operate and maintain
- Ideal for both maintenance and construction applications

 **snorkel**[™]
www.snorkellifts.com

ARTICULATING BOOM LIFTS

600AJ

DIMENSIONS 600AJ

Max. Working Height	66' 2" (20.16m)
Max. Platform Height	60' 2" (18.34m)
Max. Horizontal Reach (Unrestricted)	45' (13.71m)
Max. Horizontal Reach (Restricted)	39' (11.88m)
Clearance Height @ Max. Outreach	21' (6.40m)
Platform Size	8' x 3' 3" (2.44m x 0.99m)
Overall Length (A)	29' 2" (8.89m)
Overall Width (B)	8' 1" (2.46m)
Stowed Height (C)	8' 7" (2.61m)
Ground Clearance	13.5" (343mm)

PERFORMANCE

Platform Capacity (Restricted)	1,000 lbs (454kg)
Platform Capacity (Unrestricted)	600 lbs (272kg)
Max. Drive Height	60' 2" (18.34m)
Max. Wind Speed	28mph (12.5m/s)
Max. Drive Speed (Stowed)	3.5mph (5.63km/h)
Max. Drive Speed (Elevated)	0.6mph (0.96km/h)
Gradeability	45%
Jib Length	6' 6" (1.98m)
Jib Arc	135° (+70°/-65°)
Platform Rotation	176° (86°CW / 90°CCW)
Superstructure Rotation (Continuous)	360°
Tailswing	60" (1.52m)
Foreswing	54" (1.37m)
Inside Turning Radius	10' 1" (3.07m)
Outside Turning Radius	17' 1" (5.20m)
Raise / Lower Time	70 / 62 seconds
Tires (Foam-filled lug)	355/55 D625
Controls	Proportional
Drive System	4WD



POWER

Power Source	50hp Kubota V2403 diesel engine -or- 44hp Kubota WG1605 dual-fuel engine
--------------	---

WEIGHT

Weight	30,100 lbs (13,653kg)
--------	-----------------------

WORKING ENVELOPE

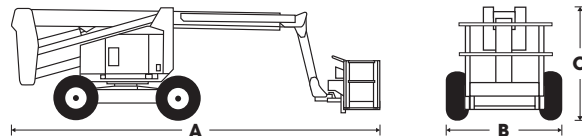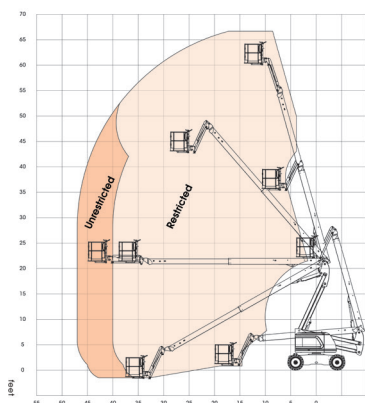

STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- Hydraulic platform rotation
- Hydraulic oil cooler
- Oscillating axle (8" of oscillation)
- 4-wheel drive
- All proportional controls
- Swing-out engine tray
- Horn
- Hour meter & on-board diagnostics display
- DC emergency option
- Tri-entry platform
- Power line to platform
- Tilt alarm & cut out
- Platform overload system
- Drive motion alarm
- Flashing amber strobe
- 2-year parts & labor warranty
- 5-year structural warranty

OPTIONS

- Airline to platform
- AC generator 110V/2.5kW (single-phase)
- AC generator 208V/7.5kW (3-phase)
NOTE: 275/280A welder only
- Environmental hydraulic oil
- Non-marking tires
- PFAS
- Special paint colors
- Tool tray
- 11' platform (replaces standard 8' platform)
- 11' platform (added to standard 8' platform)

snorkel www.snorkellifts.com

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-Free: 1 (800) 255-0317
Email: sales.usa@snorkellifts.com